

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problems Mailbox.**

[ Name of Document ]      Petition for Patent  
[ Docket Number ]          PNT990065  
[ Date of Submission ]      Heisei 11, February 8th  
[ Addressee ]                Commissioner, Patent Office

5 [ International Patent Classification ]      F02P 15/00  
   H01F 30/00  
   H01F 31/00

[ Title of the Invention ]   Ignition Coil for Internal Combustion Engine

10 [ Number of Claims ]          11  
[ Inventor ]  
    [ Home or Mailing Address ] c/o Automotive Products Division, Hitachi, Ltd., 2520 Ooaza Takaba, Hitachinaka-shi, Ibaraki-ken

15     [ Name ]                  Kenji Nakabayashi  
[ Inventor ]  
    [ Home or Mailing Address ] c/o Automotive Products Division, Hitachi, Ltd., 2520 Ooaza Takaba, Hitachinaka-shi, Ibaraki-ken

20     [ Name ]                  Junichi Shimada  
[ Inventor ]  
    [ Home or Mailing Address ] c/o Automotive Products Division, Hitachi, Ltd., 2520 Ooaza Takaba, Hitachinaka-shi, Ibaraki-ken

25     [ Name ]                  Noboru Sugiura  
[ Applicant for Patent ]  
    [ Identification Number ]          000005108

[ Name or Firm Name ] Hitachi, Ltd.

[ Agent ]

[ Identification Number ] 100061893

[ Patent Agent ]

5 [ Name or Firm Name ] Akio Takahashi

[ Telephone Number ] 03-3661-0071

[ Specifically Designated Agent ]

[ Identification Number ] 100086656

[ Patent Agent ]

10 [ Name or Firm Name ] Kyohsuke Tanaka

[ Telephone Number ] 03-3661-0071

[ Indication Relating to Government Fee ]

[ Deposit Account Number ] 011626

[ Amount of Payment ] 21000

15 [ List of Documents Submitted ]

[ Name of Document ] Specification 1

[ Name of Document ] Set of Drawings 1

[ Name of Document ] Abstract 1

[ General Authorization Number ] 9003091

20 [ General Authorization Number ] 9403294

[ Necessity of Proof ] Yes

[ Name of the Document ]      Specification

[ Title of the Invention ]   Ignition Coil for Internal  
Combustion Engine

[ Claims ]

- 5            1. An independent ignition type ignition coil for  
an internal combustion engine which is used after  
being inserted into a plug hole in the internal  
combustion engine and being directly coupled to a  
corresponding ignition plug and of which portion being  
10 inserted into the plug hole has an outer diameter of  
18mm~27mm, and which includes a center core, a  
secondary coil wound around a secondary coil bobbin  
and a primary coil wound around a primary coil bobbin  
arranged concentrically in a coil casing in this order  
15 from the inside of the coil casing and an insulation  
use resin filled between the constituting members in  
the coil casing, characterized in that between the  
primary coil bobbin and the primary coil and/or  
between layers of the primary coil a gap portion which  
20 reduces a stress component caused inside the secondary  
coil bobbin due to thermal contraction difference of  
the primary coil and the secondary coil bobbin among  
thermal stress caused inside the secondary coil bobbin  
is coexisted with the insulation use resin.
- 25            2. An independent ignition type ignition coil for  
an internal combustion engine which is used after  
being inserted into a plug hole in the internal

combustion engine and being directly coupled to a corresponding ignition plug and of which portion being inserted into the plug hole has an outer diameter of 18mm~27mm, and which includes a center core, a  
5 secondary coil wound around a secondary coil bobbin and a primary coil wound around a primary coil bobbin arranged concentrically in a coil casing in this order from the inside of the coil casing and an insulation use resin filled between the constituting members in  
10 the coil casing, characterized in that the secondary coil bobbin is constituted by a denaturated PPE containing an inorganic filler material in an amount of not less than 20 weight % and between the primary coil bobbin and the primary coil and/or between layers  
15 of the primary coil a gap portion which reduces a stress component caused inside the secondary coil bobbin due to thermal contraction difference of the primary coil and the secondary coil bobbin among thermal stress caused inside the secondary coil bobbin  
20 is coexisted with the insulation use resin.

3. An independent ignition type ignition coil for an internal combustion engine which is used after being directly coupled to a corresponding ignition plug, and which includes a center core, a secondary  
25 coil wound around a secondary coil bobbin and a primary coil wound around a primary coil bobbin arranged concentrically in a coil casing in this order

from the inside of the coil casing and an insulation use resin filled between the constituting members in the coil casing, characterized in that between the primary coil bobbin and the primary coil and/or  
5 between layers of the primary coil a gap portion which reduces a stress component cause inside the secondary coil bobbin due to thermal contraction difference of the primary coil and the secondary coil bobbin among thermal stress caused inside the secondary coil bobbin  
10 is coexisted with the insulation use resin.

4. An independent ignition type ignition coil for an internal combustion engine which is used after being directly coupled to a corresponding ignition plug, and which includes a center core, a secondary  
15 coil wound around a secondary coil bobbin and a primary coil wound around a primary coil bobbin arranged concentrically in a coil casing in this order from the inside of the coil casing and an insulation use resin filled between the constituting members in  
20 the coil casing, characterized in that at least one between the primary coil bobbin and the insulation use resin filled between the primary coil bobbin and the primary coil, between the insulation use resin filled between the primary coil bobbin and the primary coil  
25 and the primary coil and between the primary coil and the insulation use resin filled between layers of the primary coil a peeling off portion is formed.

5. An ignition coil for an internal combustion engine according to one of claims 1 through 4, the secondary coil bobbin is constituted by 45 weight %~60 weight % of denaturated PPE, 15 weight %~25 weight % of glass fiber and 15 weight %~ 35 weight % of inorganic filler material in a non-fiber shape.

6. An ignition coil for an internal combustion engine according to one of claims 1 through 5, wherein a bobbin axial direction of the secondary coil bobbin corresponds to a resin flowing direction during molding of the resin, and an average linear expansion coefficient of the secondary coil bobbin in orthogonal direction with respect to the resin flowing direction is  $35\sim 75 \times 10^{-6} \text{mm}/^{\circ}\text{C}$  at temperatures  $-30^{\circ}\text{C} \sim -10^{\circ}\text{C}$  according to a testing method conforming to ASTM D696.

7. An independent ignition type ignition coil for an internal combustion engine which is used after being directly coupled to a corresponding ignition plug, and which includes a center core, a secondary coil wound around a secondary coil bobbin and a primary coil wound around a primary coil bobbin arranged concentrically in a coil casing in this order from the inside of the coil casing and an insulation use resin filled between the constituting members in the coil casing, characterized in that on the primary coil a cover film or a cover coating is applied which facilitates peeling off of the insulation use resin

filled around the primary coil from the primary coil.

8. An independent ignition type ignition coil for an internal combustion engine which is used after being directly coupled to a corresponding ignition  
5 plug, and which includes a center core, a secondary coil wound around a secondary coil bobbin and a primary coil wound around a primary coil bobbin arranged concentrically in a coil casing in this order from the inside of the coil casing and an insulation  
10 use resin filled between the constituting members in the coil casing, characterized in that on a side of bobbin surfaces of the primary coil bobbin on which the primary coil is wound a cover film or a cover coating which facilitates peeling off of the  
15 insulation use resin around the bobbin surface from the bobbin surface.

9. An ignition coil for an internal combustion engine according to claim 7 or 8, wherein a material of the cover film or the cover coating is an  
20 insulation material containing one of nylon, polyethylene and teflon.

10. An ignition coil for an internal combustion engine according to one of claims 1 through 9, wherein the primary coil bobbin is constituted by a  
25 polybutylene terephthalate containing a rubber.

11. An ignition coil for an internal combustion engine according to one of claims 1 through 10,



wherein the center core is coated with an insulation material having an elasticity before being disposed inside the secondary coil bobbin, and after the coated center core is disposed in the secondary coil bobbin a  
5 hard epoxy resin is filled between the center core and the secondary coil bobbin.

[ Detailed Description of the Invention ]

[ 0001 ]

10 [ Technical Field of the Invention ]

The present invention relates to an independent ignition type ignition coil for an internal combustion engine which is mounted for each of respective ignition plugs for the internal combustion engine and  
15 is directly coupled each of the respective ignition plugs.

[ 0002 ]

[ Conventional Art ]

These days an independent ignition type ignition  
20 coil device for an internal engine has been developed which is used after being mounted in each of plug holes in the engine and being directly coupled to each of the respective ignition plugs. The ignition coil device of this sort unnecessitates a distributor, as a  
25 result, the decreasing of supply energy to an ignition coil through the distributor, high voltage codes therefor and the like is eliminated, moreover, since

the ignition coil can be designed without taking into account of the ignition energy decreasing, it is evaluated that the voltage for the ignition coil can be reduced and the size reduction of the ignition coil is achieved as well as because of the elimination of the distributor the spacing for mounting a variety of parts in an engine room is rationalized.

[ 0003 ]

The ignition coil of such independent ignition type is called as an in-plug mounting type, since at least a part of the coil portion is introduced into a plug hole and is mounted or fitted there, further, the coil portion is commonly called as a pencil coil, since the coil portion is shaped into a long and slender pencil so as to permit insertion the same into the plug hole, and inside a long and slender cylindrical casing a center core (which is an iron core made magnetic flux passage and is formed by laminating many silicon steel sheets), a primary coil and secondary coil are disposed. Through conduction and interruption control of a current flowing through the primary coil a high voltage necessary for ignition is generated in the secondary coil, therefore, these coils are usually wound around respective bobbins and are disposed concentrically around the center core. The insulation property for the coils is guaranteed such as by filling (hardening after filling) an

insulation use resin and by sealing an insulation oil into the coil casing accommodating the primary and secondary coils. For example, JP-A-8-255719, JP-A-9-7860, JP-A-9-17662, JP-A-8-93616, JP-A-8-97057, JP-A-8-144916 and JP-A-8-203757 disclose prior art of the present invention.

[ 0004 ]

There are two types of pencil coils, in one the primary coil is disposed inside and the secondary coil is disposed outside, and in the other the secondary coil is disposed inside and the primary coil is disposed outside. Among these two, the entire wire length of the secondary coil in the latter type (inner secondary coil structure) is short in comparison with that in the former type (outer secondary coil type) and the electrostatic stray capacity at the secondary side thereof is also small, therefore, the inner secondary coil structure is understood advantageous with regard to its output characteristic.

20 [ 0005 ]

Namely, the secondary output voltage and its building up characteristic are affected by the electrostatic stray capacity and when the electrostatic stray capacity increases, the output voltage reduces and the building up thereof is caused to delay. Accordingly, it is considered that the inner secondary coil structure which has a small

electrostatic stray capacity is suitable for reducing the size thereof and for raising the output voltage.

[ 0006 ]

[ Tasks Intended to Be Solved by the Invention ]

5        Among these sorts of the ignition coil devices of the independent ignition type, a type which uses the insulation use resin (for example, epoxy resin) filled between the constituting members (between such as a center core, bobbins and coils and between such as  
10 layers of the coils) in the coil casing eliminates a measure for sealing which is necessitated such as in the insulation oil sealing type, further, the constituting members thereof such as the center core, the bobbins and the coils are by themselves secured  
15 only by burying the same into the insulation use resin, therefore the measure for securing the constituting members is simplified in comparison with the insulation oil sealing type and thus it is evaluated that a simplification of the total device  
20 and handling easiness thereof are achieved.

[ 0007 ]

Since as the insulation use resin between the constituting members of the ignition coil device an epoxy resin is injected and hardened (filled), and  
25 since the hardening temperature of such epoxy resin is usually more than 100°C, under a low temperature less than the hardening temperature such as the insulation

use resin the bobbin material are subjected to a thermal stress based on linear expansion coefficient differences between the constituting members (in that linear thermal expansion differences between such as the bobbins, coils, center core and the insulation use resin), therefore, it is necessary to take some measures for preventing possible crackings and interface peeling-offs between the members due to the thermal stress.

10 [ 0008 ]

For example, in case of the inner secondary coil structure type;

(1) First of all, it is an important point how to reduce a thermal stress between the center core and the secondary coil bobbin of which linear expansion coefficient difference is large. For this purpose the following measures, for example, are taken, in that as the insulation use resin to be filled between the center core and the secondary coil bobbin such as a soft epoxy resin having a soft property at least above a normal temperature (a flexible epoxy resin; elastomer) is used in place of a hard epoxy resin so as to absorb a thermal impact, and in that after inserting a center core covered in advance by an insulation member having an elasticity into the secondary coil bobbin, the entire structure is sealed by a hard epoxy resin to ensure insulation property

thereof.

[ 0009 ]

(2) A primary factor of causing cracks in the bobbin material is understood to be an internal stress (thermal stress) of the bobbins due to linear expansion coefficient differences between the center core, the primary coil, the secondary coil and the bobbins (resin), in particular in case of the inner secondary coil structure type, it was clarified by the present inventors through a heat cycle testing (a heat cycle test of  $130^{\circ}\text{C}$ ~  $-40^{\circ}\text{C}$  ) that the cracking (of which cracking is so called longitudinal cracking developing into the axial direction of the bobbin) is most likely caused in the secondary coil bobbin among both bobbin materials (the heat cycle test of  $130^{\circ}\text{C}$ ~  $-40^{\circ}\text{C}$  assumes a severe engine use environment condition in cold districts).

[ 0010 ]

This crack generation mechanism in the secondary coil bobbin is caused, because the linear expansion coefficient of the bobbin material is large in comparison with those of the center core and the coil material. Namely, when the ignition coils are subjected to thermal contraction due to temperature drop after stopping of the engine operation, a thermal contraction of the secondary coil bobbin, in particular the degree of the thermal contraction in

its circumferential direction is much larger than those of the center core and the coil materials (the primary coil and the secondary coil). Accordingly, when the secondary coil bobbin tends to undergo a thermal contraction, at the inside thereof the center core is subjected to the thermal contraction force (when the resin interposed between the secondary coil bobbin and the center core is an elastomer such as a soft epoxy resin, the center core is subjected to the thermal contraction force of the secondary coil bobbin at a temperature less than the glass transition temperature thereof), as a result, the secondary coil bobbin is applied relatively of a force from the side of the center core in relation to the center core and is subjected to an expansion force in the circumferential direction. Further, when the secondary coil bobbin tends to undergo a thermal contraction, the primary coil and the secondary coil of which linear expansion coefficients are smaller than that of the secondary coil bobbin act so as to suppress the thermal contraction of the secondary coil bobbin via the insulation use resin (in other words, a tension force in the circumferential direction is provided to the secondary coil bobbin). Due to these multiple actions a large internal stress (thermal stress)  $\sigma$  is generated in the secondary coil bobbin and causes longitudinal direction crackings in the

secondary coil bobbin.

[ 0011 ]

Such longitudinal direction cracking in the secondary coil bobbin causes an electric field concentration between the center core and the secondary coil and finally leads to an insulation breakdown.

[ 0012 ]

An object of the present invention is to improve an independent ignition type ignition coil which is mounted in a plug hole and is subjected to a severe temperature environment, in that to prevent the above mentioned crackings in the secondary coil bobbin, to hold a soundness of an electric insulation performance thereof, and to achieve a high quality and high reliability of the concerned type ignition coil device.

[ 0013 ]

[ Measures for Solving the Tasks ]

The present invention primarily proposes the following task resolving measures for achieving the above object.

[ 0014 ]

(1) Namely, an independent ignition type ignition coil for an internal combustion engine according to a first aspect of the present invention which is used after being inserted into a plug hole in the internal



combustion engine and being directly coupled to a corresponding ignition plug, and which includes a center core, a secondary coil wound around a secondary coil bobbin and a primary coil wound around a primary coil bobbin arranged concentrically in a coil casing in this order from the inside of the coil casing and an insulation use resin filled between the constituting members in the coil casing, is characterized in that between the primary coil bobbin and the primary coil and/or between layers of the primary coil a gap portion which reduces a stress component caused inside the secondary coil bobbin due to thermal contraction difference of the primary coil and the secondary coil bobbin among thermal stress caused inside the secondary coil bobbin is coexisted with the insulation use resin.

[ 0015 ]

The gap is obtained by forming a peeling off portion at least one, between the primary coil bobbin and the insulation use resin (for example, an epoxy resin) filled between the primary coil bobbin and the primary coil, between the insulation use resin filled between the primary coil bobbin and the primary coil and the primary coil and between the primary coil and the insulation use resin filled between the layers of the primary coil.

[ 0016 ]

More specifically, the present invention proposes such as to apply on the primary coil a cover film or a cover coating which facilitates peeling off of the primary coil from the insulation use resin filled  
5 around the primary coil, to apply on a side of bobbin surfaces (the outside surface of the bobbin) of the primary coil bobbin on which the primary coil is wound a cover film or a cover coating which facilitates peeling off of the insulation use resin contacting the  
10 bobbin surface from the bobbin surface, and in place of these cover film and cover coating to adhere an insulation sheet having a weak adhesiveness to an epoxy resin on the primary coil. As a material for the cover film or the cover coating material having a  
15 slipping property, such as nylon, polyethylene and teflon and an overcoating containing in an insulation material a material having a small adhesiveness to an epoxy resin are exemplified.

[ 0017 ]

20 When temperature lowers after hardening the epoxy resin a tension force acts at the interfaces between the epoxy resin and the primary coil or the primary coil bobbin due to the linear expansion coefficient difference between the epoxy resin and the primary  
25 coil material copper, and a peeling off will be caused at a portion having a weak adhesiveness with the epoxy resin.

[ 0018 ]

The principle of the present invention is as follows, in that when the ignition coil tends to undergo a thermal contraction due to temperature drop  
5 after stopping of the engine operation, the secondary coil bobbin is subjected relatively to an expansion force in the circumferential direction from the side of the center core due to the thermal contraction difference (the linear expansion coefficient  
10 difference), further, the secondary coil bobbin is subjected relatively to a tension force in the circumferential direction from the side of the primary coil and the secondary coil via the insulation use resin and with these multiple actions a large internal  
15 stress  $\sigma$  is generated in the secondary coil bobbin.

However, according to the present invention, a gap (for example, the above peeling off portion) is interposed between the primary coil bobbin and the primary coil and/or between the layers of the primary  
20 coil, thereby, a transmission passage of the tension force in the circumferential direction acting from the primary coil to the secondary coil bobbin can be interrupted.

[ 0019 ]

25 Accordingly, among the stress  $\sigma_1$  caused in the secondary coil bobbin a stress component  $\sigma_1$  caused in the secondary coil bobbin due to the thermal

contraction difference between the primary coil and the secondary coil bobbin is reduced, thereby, the total internal stress  $\sigma$  can be greatly reduced (relaxed). According to CAE (Computer Aided Engineering) analysis examples performed by the present inventors, through the reduction of the above mentioned stress component  $\sigma_1$  it is determined that at least 20% of the total internal stress can be reduced. Further, such reduction value in the internal stress was confirmed by making use of an ignition coil which is used after being inserted into a plug hole in an internal combustion engine and being directly coupled to a corresponding ignition plug and of which portion being inserted into the plug hole has an outer diameter of 18mm~27mm (in a long and slender cylindrical type ignition coil of this sized, usually the thickness of the primary coil bobbin is 0.5mm~1.2mm, the thickness of the secondary coil bobbin is 0.7mm~1.6mm and the length of the bobbins is 50mm~150mm).

[ 0020 ]

Further, it was confirmed through experimental results that even if the above mentioned gap (for example the peeling off portion) is provided between the primary coil bobbin and the primary coil and/or between the layers of the primary coil, no electric field concentration between the primary coil is caused

because of a low potential (substantially at the ground potential) of the primary coil, in addition if the secondary coil, the insulation use resin and the primary coil bobbin are closely bonded without gaps, 5 the insulation between the primary coil and the secondary coil can be sufficiently ensured, moreover, a possible electric field concentration due to the line voltage of the secondary coil can be sufficiently prevented, thereby a possible generation of insulation 10 breakdown can be prevented. (2) Further, in addition to the above explained first aspect of the present invention, for example, when a denaturated PPE (denaturated polyphenylene-ether) is used for the secondary coil bobbin, and if in view of material 15 property improvement of the secondary coil bobbin, more than 20 weight % of inorganic filler material is included in the secondary coil bobbin, the internal stress  $\sigma$  therein can be further reduced.

[ 0021 ]

20 Although the denaturated PPE is excellent in its adhesiveness with the epoxy resin serving as the insulation use resin, and further the moldability and insulation property thereof are desirable which contribute to stabilize the quality of the secondary 25 coil bobbin, however, if it contains an inorganic filler material of less than 20 weight %, the linear expansion coefficient difference with other

constituting members (such as the center core, the primary coil and the secondary coil) enlarges and the internal stress (thermal stress)  $\sigma$  increases. For example, according to CAE analysis examples performed, 5 when there is no decreases in the above mentioned  $\sigma$ , and when the temperature of the ignition coil is suddenly reduced under a temperature environment of 130°C~-40°C, the internal stress  $\sigma$  generated in the secondary coil bobbin showed a large value of about 10 90MPa~100MPa. Contrary thereto, according to the present invention the internal stress  $\sigma$  can be reduced below 70MPa, thereby, the longitudinal direction cracking in the secondary coil bobbin can be prevented. Further, as an optimum example which can 15 reduce the internal stress  $\sigma$  while maintaining the moldability (resin flowability), the present invention proposes a material constituted by 45 weight % ~60 weight % of denaturated PPE, 15 weight % ~25 weight % of glass fiber and 15 weight % ~35 weight % of 20 inorganic filler material in a non-fiber shape, the details of which will be explained in the description of the embodiments below.

[ 0022 ]

Further, in view of the fact that it is 25 preferable to vary linear expansion coefficient of a bobbin concerned for reducing the internal stress  $\sigma$  in

the bobbin, when the resin flowing direction for the resin molding is the bobbin axial direction, a desirable result was obtained when the linear expansion coefficient in orthogonal direction, (which  
5 corresponds to the radial direction and the circumferential direction of the bobbin, and an important point for preventing the longitudinal direction cracking of the bobbin is in particular, to suppress the internal stress in the circumferential  
10 direction) with respect to the resin flowing direction is  $35\sim 75 \times 10^{-6} \text{mm}/^{\circ}\text{C}$  in average at a temperature range  $-30^{\circ}\text{C} \sim -10^{\circ}\text{C}$  based on a testing method conformed to ASTM D696 in the above referred to limited containing range of the inorganic filler material, of which  
15 details will also be explained in the description of the embodiments below.

[ 0023 ]

[Embodiments of the Invention]

Embodiments of the present invention will be  
20 explained with reference to the drawings.

[ 0024 ]

Fig. 1 is a vertical cross sectional view of an ignition coil for an internal combustion engine representing one embodiment of the present invention,  
25 Fig. 2 is a view showing by enlarging portion B in Fig. 1 and by turning the same in lateral direction, and Fig. 3 is a lateral cross sectional view taken

along a line A-A' in Fig. 1.

[ 0025 ]

Inside a long and slender cylindrical casing (outer sheath casing) 6 a center core 1, a secondary coil wound around a secondary coil bobbin 2 and a primary coil 5 wound around a primary coil bobbin 4 are arranged concentrically from the center (inside) thereof toward the outside. At the outside of the outer sheath casing 6 a side core 7 which forms a magnetic flux passage with the center core 1 is mounted.

[ 0026 ]

The center core 1 is formed by pressedly laminating many number of silicon steel sheets or directional silicon steel sheets having a few types of different width as for example illustrated in Fig. 3 for increasing the cross sectional area thereof. At both ends of the center core 1 in its axial direction magnets 9 and 10 are disposed adjacent to the center core 1. These magnets 9 and 10 generate magnetic fluxes in the direction opposite to coil induced magnetic fluxes passing through the center core 1, thereby, the core of the ignition coil can be operated below the saturation point in the magnetizing curve of the core. The magnet can be disposed only at one end of the center core 1. Reference numeral 24 is an elastic body (for example, a rubber) which absorbs a



thermal expansion of the center core 1 in its axial direction.

[ 0027 ]

Between the center core 1 which is inserted  
5 within the secondary coil bobbin 2 and the secondary  
coil bobbin 2 as illustrated in Fig. 2, a so called  
soft epoxy resin (a flexible epoxy) 17 is filled and  
in gaps between the respective constituting members of  
the secondary coil bobbin 2, the secondary coil 3, the  
10 primary coil bobbin 4, the primary coil 5 and the coil  
casing 6 a hard epoxy resin (a thermosetting epoxy  
resin) 8 is filled.

[ 0028 ]

The soft epoxy resin 17, of which glass  
15 transition temperature is below a normal temperature  
(20°C), is an epoxy resin having an elastic and soft  
property (elastomer) above the glass transition  
temperature and is, for example, a mixture of an epoxy  
resin and a denaturated aliphatic polyamide.

20 [ 0029 ]

The reason why the soft epoxy resin 17 is used  
for the insulation use resin between the center core 1  
and the secondary coil bobbin 2 is that since the so-  
called pencil type coil (an in-plug hole mounted  
25 independent ignition type ignition coil) is subjected  
to a severe temperature environment (a thermal stress  
of about -40°C ~ 130°C) as well as the difference

between the linear expansion coefficient ( $13 \times 10^{-6} \text{mm}/^\circ\text{C}$ ) of the center core 1 and the linear expansion coefficient ( $40 \times 10^{-6} \text{mm}/^\circ\text{C}$ ) of the hard epoxy resin is large, if a usual insulation use epoxy resin (an epoxy resin composition harder than the soft epoxy resin 17) is used, it is feared that a cracking will occur in the epoxy resin due to heat shock (thermal impact) and an insulation breakdown will be caused. Namely, so as to counter-measure such heat shock the soft epoxy resin 17 is used which is an elastic body excellent for absorbing a thermal impact and has an insulation property.

[ 0030 ]

Now, the secondary coil bobbin 2 will be explained. The secondary coil bobbin 2 according to the present embodiment is provided based on the following knowledges.

[ 0031 ]

(1) The secondary coil bobbin is required to satisfy the condition; [an allowable stress  $\sigma_0$  of the secondary coil bobbin 2 > an induced stress  $\sigma$  at temperature ( $-40^\circ\text{C}$  minus glass transition temperature  $T_g$  of the soft epoxy resin 17)]. Herein, as an example, a glass transition temperature  $T_g = -25^\circ\text{C}$  of the soft epoxy resin 17 is exemplified.

[ 0032 ]

For example, when the glass transition

temperature of the soft epoxy resin 17 is  $T_g = -25^{\circ}\text{C}$  and when the secondary coil bobbin 2 is placed under an environment in which temperature varies in a range of  $130^{\circ}\text{C} \sim -40^{\circ}\text{C}$  and contracts because of a temperature drop after stopping of the operation of the concerned internal combustion engine, the contraction of the secondary coil bobbin 2 can be accepted in a temperature range of  $130^{\circ}\text{C} \sim -25^{\circ}\text{C}$  through the elastic absorption by the soft epoxy resin 17, therefore, among the thermal stress  $\sigma$  caused in the secondary coil bobbin 2 a thermal stress component  $\sigma_3$  acted from the side of the center core 1 is substantially null stress. However, when observing as a whole, if the secondary coil bobbin 2 tends to undergo a thermal contraction, the primary coil 5 and the secondary coil 3 of which linear expansion coefficients (thermal expansion coefficients) are smaller than that of the secondary coil bobbin 2 act to suppress the thermal contraction of the secondary coil bobbin 2 via the hard epoxy resin 8. In other words, the primary coil 5 and the secondary coil 3 provide relatively a tension force to the secondary coil bobbin 2 in the circumferential direction. Thereby, the sum of a thermal stress component  $\sigma_1$  acted from the primary coil 5 and a thermal stress component  $\sigma_2$  acted from the secondary coil 3 constitutes main components in

the internal stress  $\sigma$  in the secondary coil bobbin 2.

[ 0033 ]

In a temperature range of  $-25^{\circ}\text{C} \sim -40^{\circ}\text{C}$ , the soft epoxy resin 17 moves into a glass state, thereby, the contraction (deformation) from the side of the center core 1 of the secondary coil bobbin 2 is also prevented, thus at the inside of the secondary coil bobbin 2 in addition to the above mentioned thermal stresses  $\sigma_1$  and  $\sigma_2$  provided from the primary coil and the secondary coil, the thermal stress  $\sigma_3$  provided by a force from the side of the center core is added, and the summed stress of these components  $\sigma_1$ ,  $\sigma_2$  and  $\sigma_3$  constitutes the main components for the internal stress  $\sigma$  in the secondary coil bobbin 2.

15 [ 0034 ]

The thermal stress caused in the secondary coil bobbin 2 can be expressed as  $\sigma = E \cdot \epsilon = E \cdot \alpha \cdot T$ . Wherein  $E$  is a Young's modulus of the secondary coil bobbin 2,  $\epsilon$  is a stress therein,  $\alpha$  is a linear expansion coefficient thereof and  $T$  is a temperature variation (temperature difference). When the allowable stress  $\sigma_0$  for the secondary coil bobbin 2 is larger than the generated stress  $\sigma$  ( $\sigma < \sigma_0$ ), the secondary coil bobbin 2 is never broken.

25 [ 0035 ]

(2) It is required to select a material which shows a good adhesiveness with the epoxy resin 8 for the secondary coil bobbin 2. When the adhesiveness of the selected material with the epoxy resin 8 is poor, it is feared that a peeling off between the secondary coil bobbin 2 and the epoxy resin 8 may be caused which will lead an insulation breakdown.

[ 0036 ]

Now, a mechanism of such insulation breakdown, when a peeling off (including a cracking in the insulation use resin) between the insulation use resin and the bobbin material is caused, is explained with reference to Fig. 8.

[ 0037 ]

Fig. 8 shows a partly enlarged pencil coil having an inner secondary coil structure, in that partly enlarged cross sectional view showing a plurality of flanges (flanges for defining respective spool areas) 2B formed on the outer surface of the secondary coil bobbin 2 along the axial direction thereof with a predetermined interval so as to wind the secondary coil 3 in a divided manner.

[ 0038 ]

Among the epoxy resins 8, the epoxy resin 8 which is filled between the secondary coil bobbin 2 and the primary coil bobbin 4 reaches to the outer surface of the secondary coil bobbin 2 through resin injection

(vacuum injection) while penetrating between wires of the secondary coil 3 other than between the secondary coil 3 and the primary coil bobbin 4. Further, as has been already explained, between the center core 1 and the secondary coil bobbin 2 the soft epoxy resin 17 is filled.

[ 0039 ]

In this instance, if an adherence strength (a bonding strength) between the insulation use resin, the secondary coil bobbin and the primary coil bobbin is poor, peelings-off are caused between the secondary coil bobbin 2 and the insulation use resin 8 penetrating between the secondary coil bobbin 2 and the secondary coil 3 as illustrated by reference character (a) and between the secondary coil bobbin flange 2B and the insulation use resin 8 as illustrated by reference character (b). Further, areas between the insulation use resin 8 and the primary coil bobbin 4 as illustrated by reference character (c) and between the insulation use resin 17 and the secondary coil bobbin 2 as illustrated by reference character (d) are also considered as possible areas where a peeling off can occur.

[ 0040 ]

If a peeling off is caused at a position indicated by reference character (a), an electric field concentration is induced by the line voltage of

the secondary coil 3 through the peeled off portion (a gap), which causes a partial discharge between the wires of the secondary coil 3 thereby to heat the same, and an enamel coating for the wire material of the secondary coil is burned off to cause a layer shorting. Further, if a peeling off is caused at a portion indicated by reference character (b), an electric field concentration between the wires between dividedly wound adjacent areas of the secondary coil 3 is caused and through a possibly induced partial discharge like the above a layer shorting is caused. If a peeling off is caused at the position indicated by reference character (c), an insulation breakdown will be caused between the secondary coil 3 and the primary coil 5, and if a peeling off is caused at the position indicated by reference character (d), an insulation breakdown will be caused between the secondary coil 3 and the center core 1.

[ 0041 ]

In the present embodiment, in order to satisfy the above condition (2), a denaturated PPE which shows an excellent adhesiveness with an epoxy resin is used as the material for the secondary coil bobbin 2. In order to ensure the strength thereof, this material contains an inorganic material (such as glass filler and mica), further, in the present embodiment, in order to satisfy the above condition (1), namely, in

order to lower the linear expansion coefficient  $\alpha$  as much as possible, further in order to reduce the thermal stress (internal stress)  $\sigma$  and resultantly in order to realize the above mentioned relationship, the allowable stress  $\sigma_0 > \sigma$ , not less than 20 weight % of an inorganic material, preferably not less than 30 weight % thereof is mixed in the material mentioned above. Further, in order to ensure an injection moldability of the secondary coil bobbin 2, it is necessary to improve the flowability of the resin in its solution state, therefore, other than a fibrous material such as glass filler, mica representing non-fibrous inorganic material is mixed into the inorganic material.

[ 0042 ]

Fig. 10 shows a perspective cross sectional view taken by cutting in half of a part of the secondary coil bobbin 2 according to the present embodiment, and the resin flow direction during molding of the secondary coil bobbin 2 of the present embodiment is in the axial direction of the bobbin, in that the radial direction and the circumferential direction of the bobbin is the orthogonal direction with respect to the resin flowing direction for the secondary coil bobbin 2. Fig. 11 is a view prepared by schematically enlarging portion P in Fig. 10, wherein the glass fibers serving as the filler is directed in the resin



flowing direction, accordingly, the linear expansion coefficient of the secondary coil bobbin is sufficiently small in comparison with those in the radial direction and the circumferential direction which are orthogonal to the axial direction. When it is required to reduce the linear expansion coefficients in the radial direction and the circumferential direction without damaging the flowability of the resin, it is necessary to reduce the linear expansion coefficients in the radial direction and the circumferential direction as much as possible by mixing a non-fibrous filler material (for example, mica and talc) in addition to the glass fibers. It is necessary to reduce the linear expansion coefficient of the bobbin in the circumferential direction (orthogonal direction with respect to the resin flowing direction) as much as possible in order to endure the internal stress (thermal stress)  $\sigma$  caused in the secondary coil bobbin.

2.

[ 0043 ]

Fig. 13 shows a relationship between amount of mica contained and linear expansion coefficient in orthogonal direction with respect to resin flowing direction (an average linear expansion coefficient in a temperature range of  $-30^{\circ}\text{C}$  ~  $-10^{\circ}\text{C}$  determined according to a test method conformed to ASTM D696),

when the secondary coil bobbin 2 is formed of a denaturated PPE (of 20 weight % glass fiber base). In the drawing E-06 represents  $10^{-6}$ . In this instance, when an amount of the inorganic filler is 20 weight % (20 weight % of glass fiber and 0 weight % of mica) in total, a linear expansion coefficient of above  $70 \times 10^{-6} \text{ mm}/^{\circ}\text{C}$  (in the test example,  $66.8 \times 10^{-6} \text{ mm}/^{\circ}\text{C}$ ) can be obtained, further, with 20 weight % of glass fiber and 20 weight % of mica a linear expansion coefficient of about  $50 \times 10^{-6} \text{ mm}/^{\circ}\text{C}$  (in the test example,  $49.3 \times 10^{-6} \text{ mm}/^{\circ}\text{C}$ ) is obtained and with 20 weight % of glass fiber and 30 weight % of mica a linear expansion coefficient of about  $40 \times 10^{-6} \text{ mm}/^{\circ}\text{C}$  (in the test example,  $39.6 \times 10^{-6} \text{ mm}/^{\circ}\text{C}$ ) is obtained. For example, when it is required to suppress the linear expansion coefficient at about  $40 \sim 50 \times 10^{-6} \text{ mm}/^{\circ}\text{C}$  and in case that the amount of the glass fiber is 20 weight %, the amount of mica is determined in a range of 20~ 30 weight %, further, when the amount of glass fiber is about 15~ 25 weight % and the linear expansion coefficient is required to be suppressed at about  $40 \sim 50 \times 10^{-6} \text{ mm}/^{\circ}\text{C}$ , the amount of mica of about 15~ 35 weight % is required. More specifically, the amount ranges of the respective constituting elements are 45~ 60 weight % of denaturated PPE, 15~ 25 weight % of glass fiber and 15 ~ 35 weight % of mica. An optimum composition example for the secondary coil bobbin 2 according to the

present embodiment is 55 weight % of denaturated PPE, 20 weight % of glass fiber and 30 weight % of mica. As will be observed from Fig. 13, the linear expansion coefficient in the orthogonal direction is approximately inverse proportional to the mica content.

[ 0044 ]

Further, a denaturated PPE containing 50 weight % of inorganic material shows a linear expansion coefficient of  $20\sim 30\times 10^{-6}\text{mm}/^{\circ}\text{C}$  in the resin flowing direction during molding thereof in a temperature range of  $-30^{\circ}\text{C}\sim 100^{\circ}\text{C}$ .

[ 0045 ]

Now, it is of course advantageous to use a thicker bobbin in order to ensure the strength of the secondary coil bobbin 2, however, a pencil coil is generally required to be inserted into a slender plug hole having a diameter of 18mm~ 27mm, therefore, the outer diameter of the coil portion to be inserted including the side core has to be sized about 18mm~ 27mm. In such narrow space the constituting elements such as the coil casing 6, the primary coil 5, the primary coil bobbin 4, the secondary coil 3, the secondary coil bobbin 2 and the center core 1 have to be disposed and the epoxy resin 8 has to be filled in gaps between the constituting elements and in the constituting elements themselves so as to eliminate

defects such as voids. Accordingly, it is desirable to reduce the thickness of the respective portions as much as possible.

[ 0046 ]

5 In the present embodiment, the thickness of the primary coil bobbin is selected to be 0.5mm~ 1.2mm, the thickness of the secondary coil bobbin is selected to be 0.7mm~ 1.6mm and the length of the bobbins is selected to be 50mm~ 150mm.

10 [ 0047 ]

The linear expansion coefficient of the secondary coil 3 which is wound around the secondary coil bobbin 2 is about  $20 \times 10^{-6} \text{mm}/^{\circ}\text{C}$  at a temperature of  $-40^{\circ}\text{C}$  under a condition that the epoxy resin 8 is  
15 impregnated between the wires thereof, and the linear expansion coefficient of the primary coil 4 which is wound around the primary coil bobbin 4 is about  $22 \times 10^{-6} \text{mm}/^{\circ}\text{C}$  at a temperature of  $-40^{\circ}\text{C}$  under a  
20 condition that the epoxy resin 8 is impregnated between the wires thereof. Further, the linear expansion coefficients referred to throughout the present specification are determined according to a test method conforming to ASTM D696.

[ 0048 ]

25 The secondary coil 3 is constituted by winding an enamel wire having a diameter of about 0.03mm~ 0.1mm in about 5000~ 35000 turns in total in a divided

manner. On the other hand, the primary coil 5 is constituted by winding an enamel wire having a diameter of about 0.3mm~ 1.0mm in about 100~ 300 turns in total in a plurality of layers (herein two layers) while each layer containing a few ten turns. An outer cover structure of the primary coil 5 will be explained later.

[ 0049 ]

The primary coil bobbin 4 is constituted by a PBT containing rubber. The reason why PBT is used is to keep the linear expansion coefficient thereof to be equivalent to that of the epoxy resin 8 or in a range of  $\pm 10\%$  thereof as well as to increase the adherence property thereof with the epoxy resin 8 by means of the rubber contention. Specifically, the composition thereof is, for example, 55 weight % of PBT, 5 weight % of rubber, 20 weight % of glass fiber and 20 weight % of plate shaped elastomer.

[ 0050 ]

As schematically illustrated in Fig. 9, in addition to a cover coating 5A of an insulating body (for example, esterimide, amideimide and urethane) having a thickness of  $10\mu\text{m}$ ~  $20\mu\text{m}$  provided around a copper wire (diameter of  $500\mu\text{m}$ ~  $800\mu\text{m}$ ) for the primary coil 5, another cover coating (an overcoating) 5B is further provided at the outside of the cover coating 5A which facilitates peeling off of the primary coil 5

from the insulation use resin (epoxy resin) 8 filled around the primary coil 5. The overcoating 5B is constituted by adding a few % of such as nylon, polyethylene and teflon which improves a slipping  
5 property into a material same as that constituting the insulating body 5A, and the thickness of the cover film is  $1\mu\text{m}$ ~  $5\mu\text{m}$ .

[ 0051 ]

The reasons why positively applying on the  
10 primary coil 5 the overcoating 5B, having a poor adhesiveness with the epoxy resin 8 as indicated above is to reduce the stress component  $\sigma_1$  caused inside the secondary coil bobbin 2 due to the thermal contraction difference (linear expansion coefficient difference)  
15 between the primary coil 5 and the secondary coil bobbin 2 among the entire stress  $\sigma$  caused inside the secondary coil bobbin 2 (to satisfy the above condition (1)).

[ 0052 ]

20 Namely, because of the existence of the above overcoating 5B, a peeling off portion (gap) 50 is generated between the primary coil 5 and the epoxy resin 8 existing around the primary coil 5 as shown in Fig. 4, in that, the peeling off portions 50 co-exist  
25 with the epoxy resin 8 such as between the epoxy resin 8 filled between the primary coil bobbin 4 and the primary coil 5 and the primary coil 5, and between

layers of the primary coil 5. Further, Fig. 4 is a cross sectional view enlarging portion C in Fig. 2 and which is prepared based on a microscopic tomogram (magnification of 30~ 40 times) taken from the portion  
5 corresponding to portion C.

[ 0053 ]

As has been explained above, through interposition of the gaps (peeling off portions) 50 such as between the primary coil bobbin 4 and the primary coil  
10 5 and between the layers of the primary coil 5, the transmission passage of a tension force (the tension force due to the thermal expansion difference between the primary coil and the secondary coil bobbin) in the circumferential direction acting on the secondary coil  
15 bobbin 2 from the primary coil 5 can be interrupted. Accordingly, through the reduction of the stress component  $\sigma_1$  caused by the existence of the primary coil among the entire stress  $\sigma$  caused in the secondary coil bobbin, it is possible to reduce (relax) more  
20 than 20% of the entire stress  $\sigma$ . Further, through the inclusion of the inorganic filler of more than 20 weight % as has been mentioned above, the material quality of the secondary coil bobbin, in that linear expansion coefficient, of the denaturated PPE is  
25 improved and the internal stress (thermal stress) can be reduced, therefore, according to CAF analysis examples, performed by the present inventors the

induced stress  $\sigma$  in the secondary coil bobbin in the circumferential direction (the orthogonal direction with respect to the resin flowing direction during the bobbin molding, hereinbelow sometimes being referred to as  $\theta$  direction) can be greatly reduced through the multiple effects with the stress relaxing action by the gaps 50 as indicated above.

[ 0054 ]

Fig. 12 shows a relationship between linear expansion coefficient of the secondary coil bobbin according to the present embodiment in the orthogonal direction with respect to the resin flowing direction (the bobbin axial direction) and induced stress (in  $\theta$  direction) in the bobbin is shown.

15 [ 0055 ]

The induced stress (thermal stress) in the secondary coil bobbin as shown in Fig. 12, in that the internal stress induced at temperature  $-40^{\circ}\text{C}$  in  $\theta$  direction while assuming that the induced stress at the temperature  $130^{\circ}\text{C}$  when the epoxy resin is hardened is zero, is determined in the following manner, in that by making use of a CAF analysis software, by preparing a three dimensional model of an ignition coil and by inputting material property values (linear expansion coefficient, Young's modulus and Poisson's ratio of the respective. Further, as an approximate



value of the linear expansion coefficient in such material property values at the temperature  $-40^{\circ}\text{C}$ , an average value  $35\sim 75\times 10^{-6}\text{mm}/^{\circ}\text{C}$  of the secondary coil bobbin material at temperatures of  $-30^{\circ}\text{C}\sim -10^{\circ}\text{C}$  is  
5 used.

[ 0056 ]

In Fig. 12, the solid line A corresponds to the present embodiment (in which the peeling off portions  
50 are provided around the primary coil) and is  
10 determined in view of the secondary coil bobbin material exemplified in Fig. 13 (20 weight % of glass filler base as of Fig. 12 and including 0 weight %, 20 weight % or 30 weight % of mica) and by using the average linear expansion coefficient  $35\sim 75\times 10^{-6}\text{mm}/^{\circ}\text{C}$  at  
15 a temperature range of  $-30^{\circ}\text{C}\sim -10^{\circ}\text{C}$  as an approximate value of the inner expansion coefficient of the secondary coil bobbin. More specifically, the CAF analysis was performed by making use of the five approximated linear expansion coefficients in  $\theta$  direct  
20 ion of the secondary coil bobbin at temperature  $-40^{\circ}\text{C}$ , in that about  $40\times 10^{-6}\text{mm}/^{\circ}\text{C}$  (strictly,  $39.6\times 10^{-6}\text{mm}/^{\circ}\text{C}$ ), about  $50\times 10^{-6}\text{mm}/^{\circ}\text{C}$  (strictly,  $49.3\times 10^{-6}\text{mm}/^{\circ}\text{C}$ ) and about  $70\times 10^{-6}\text{mm}/^{\circ}\text{C}$  (strictly  $66.8\times 10^{-6}\text{mm}/^{\circ}\text{C}$ ), and as tolerances  $35\times 10^{-6}\text{mm}/^{\circ}\text{C}$  and  $75\times 10^{-6}\text{mm}/^{\circ}\text{C}$ .

25 [ 0057 ]

As the result of the analysis, it is determined that the averaged linear expansion coefficient of the

secondary coil bobbin at a temperature approximating of  $-40^{\circ}\text{C}$  ( $-30^{\circ}\text{C}$ ~  $-10^{\circ}\text{C}$ ) is assumed as  $35\sim 75\times 10^{-6}\text{mm}/^{\circ}\text{C}$  (the lowest value  $35\times 10^{-6}\text{mm}/^{\circ}\text{C}$  in the averaged value is based on the limitation of composition amount of the inorganic filler which permits molding of the secondary coil bobbin), the induced stress in the secondary coil bobbin can be reduced less than 70 MPa (which is an allowable upper limit of the internal stress (thermal stress) in the secondary coil bobbin and is determined as a target value by the present inventors).

[ 0058 ]

The target value less than 70 MPa of the induced stress is based on the CAF analysis performed by the present inventors, and the ground of such numerical value is for passing a heat cycle test (a test of repeating temperature variation of  $130^{\circ}\text{C}$ ~  $-40^{\circ}\text{C}$  at 300 times) which sufficiently satisfies the durability of this sort of ignition coil for an internal combustion engine as shown in Fig. 14. Fig. 14 is a characteristic test diagram of the induced stress in the secondary coil bobbin 2 and number of heat cycles, the abscissa represents the number of heat cycles and the ordinate represents the induced stress, and the induced stress below 70 MPa shows that no crackings are caused in the secondary coil bobbin even when being subjected to the heat cycles more than 300

times.

[ 0059 ]

Further, the solid line B in Fig. 12 is a comparative example showing an analysis result of the induced stress in a secondary coil bobbin for an ignition coil in which no peeling off portions 50 as referred to above are provided around the primary coil when the linear expansion coefficient thereof in  $\theta$  direction is set likely as that shown in the solid line A, in this instance all of the induced stresses of the secondary coil bobbins in the circumferential direction showed more than 80 MPa.

[ 0060 ]

Further, it was confirmed through experimental results performed by the present inventors that even if the above mentioned peeling off portion 50 is provided between the primary coil bobbin 4 and the primary coil 5 and between the layers of the primary coil 5, no electric field concentration between the primary coil 5 is caused because of a low potential (substantially at the ground potential) of the primary coil 5, in addition if the secondary coil 3, the insulation use resin 8 and the primary coil bobbin 4 are closely bonded without gaps, the insulation between the primary coil and the secondary coil can be sufficiently ensured, moreover, a possible electric field concentration due to the line voltage of the

secondary coil is prevented, thereby a possible generation of insulation breakdown can be prevented.

[ 0061 ]

In particular, according to the present  
5 embodiment, since the PBT containing rubber is used  
for the primary coil bobbin, the adherence property  
thereof with the epoxy resin is increased, thereby, at  
the inner diameter side of the primary coil bobbin 4 a  
possible peeling off thereof from the epoxy resin 8 is  
10 surely prevented and a desirable insulation property  
is realized while maintaining an adherence property  
between the secondary coil, the epoxy resin 8 and the  
primary coil bobbin 4.

[ 0062 ]

15 Further, for the primary coil bobbin 4 a thermo-  
plastic resin such as PPS (polyphenylene sulfide) and  
denaturated PPE can be used.

[ 0063 ]

For the coil casing 6 a thermoplastic resin such  
20 as PBT, PPS and denaturated PPE is used. At the  
outside surface of the coil casing 6 the side core 7  
is mounted. The side core 7 constitutes a magnetic  
flux passage together with the center core 1, and is  
formed by deforming a thin silicon steel sheet or  
25 directional silicon steel sheet having a thickness of  
about 0.3mm~ 0.5mm into a tube shape.

[ 0064 ]

Reference numeral 20 is an ignition circuit unit (ignitor) coupled onto the top portion of the coil casing 6, inside a unit casing 20a an electronic circuit (an ignition coil drive circuit 23) for driving the ignition coil is mounted and a connector portion 21 for connecting to an external portion is molded integrally together with the unit casing 20a.

[ 0065 ]

The ignition coil drive circuit 23 according to the present embodiment is transfer-molded finally, and Fig. 7(a) is a front view of the discrete product thereof, Fig. 7(b) is an upper view thereof and Fig. 7(c) is a view showing a state when an ignition coil drive circuit use hybrid IC 30a and a element (semiconductor chip) 30b are mounted on a base (substrate) 31 with terminals 33 before performing the transfer-molding. As illustrated in Figs. 7(a)- 7(c) after mounting the hybrid IC 30a and the power element 30b on the base 31, the transfer-mold 32 is applied.

[ 0066 ]

Fig. 6 shows a state where the transfer-molded ignition coil drive circuit 23 is mounted within the unit casing 20a and after connecting the terminals 33 of the ignition coil drive circuit 23 to connector terminals 22 of the unit casing 20a at the time of mounting, the epoxy resin 8 is injected into the unit casing 20 and hardened. Fig. 1 shows a state where

the epoxy resin 8 is filled in the unit casing 20a and the transfer-molded ignition coil drive circuit 23 is illustrated in a perspective state. The ignition coil drive circuit 23 is buried in the epoxy resin 8.

5       [ 0067 ]

In the present embodiment, circuit elements other than the power transistor in the ignition coil drive circuit 23 which are not suitable to be incorporated into a chip, for example a capacitor (not shown) for preventing noises is attached at the outside of the  
10       pencil coil. The noises preventing use capacitor is arranged between a power source line and ground both of which are not illustrated, and prevents noises generated in connection with the conduction control of  
15       the ignition coil.

      [ 0068 ]

Through use of such transfer-molded ignition coil drive circuit 23, the ignition coil drive circuit 23 can be formed into one chip IC which simplifies the  
20       production process, thereby, advantages such as cost reduction and input current decrease can be achieved.

      [ 0069 ]

Reference numeral 11 is a high voltage diode, reference numeral 12 is a leaf spring, reference  
25       numeral 13 is a high voltage terminal, reference numeral 14 is an ignition plug connection use spring and reference numeral 15 is an ignition plug

connection use rubber boot. The high voltage diode 11 functions to prevent an earlier firing, when a high voltage generated at the secondary coil 3 is supplied to the ignition plug via the leaf spring 12, the high  
5 voltage terminal 13 and the spring 14.

[ 0070 ]

The primary functions and advantages of the present embodiment are as follows.

[ 0071 ]

10 (1) Even when the independent ignition type ignition coil which is fitted into a plug hole and is subjected to a severe temperature environment, an internal stress  $\sigma$  (thermal stress) induced in the secondary coil bobbin can be lowered.

15 [ 0072 ]

Therefore, according to the present embodiment, the internal stress  $\sigma$  induced in the secondary coil bobbin is significantly reduced and the prevention of a cracking of the secondary coil bobbin (longitudinal  
20 direction cracking prevention) is surely achieved. In experiments, the secondary coil bobbin 2 was observed after subjecting the same repeatedly to a temperature variation of 130°C~ -40°C in 300 times, and it was confirmed that no damages are caused in the secondary  
25 coil bobbin 2 and the soundness thereof is maintained.

[ 0073 ]

(2) Further, even if the above gaps 50 are

provided, the bonding property (adhesiveness) of the epoxy resin with the secondary coil bobbin 2 and the bonding property of the epoxy resin with the inside of the primary coil bobbin are desirable, a highly  
5 reliable pencil coil can be provided without deteriorating the insulation property thereof.

[ 0074 ]

Further, in the present embodiment, although the gaps 50 are formed between the primary coil 4 and the  
10 insulation use resin 8 around the primary coil 4, if other than the above, air gap portions (peeling off portions) 51 are formed between the insulation use resin (epoxy resin) 8 filled between the primary coil bobbin 4 and the primary coil 5 and the primary coil  
15 bobbin 5 as illustrated in Fig. 5, the same advantages (1) according to the present embodiment can be expected.

[ 0075 ]

For example, in Fig. 5 embodiment, on one of the  
20 bobbin surfaces (outside surface of the bobbin) in the primary coil bobbin 4 on which the primary coil 5 is wound is applied an overcoating (cover film or cover coating) 4A which facilitates peeling off of the bobbin surface from the epoxy resin 8 contacting the  
25 bobbin surface, thereby the air gap portions are obtained. The material of the overcoating 4A is the like material as that of the already explained



overcoating 5B. Further, in place of the above referred to overcoating a sheet of which adhesiveness with epoxy is weak can be adhered on the outside surface of the primary coil bobbin.

5 [ 0076 ]

Further, both gaps 50 and 51 can be provided.

[ 0077 ]

Fig. 15 is a partially omitted cross sectional view showing another embodiment of the present  
10 invention, although not illustrated, the stress relaxing use gaps (peeling off portions) 50 and 51 like the above are provided between the primary coil bobbin 4 and the primary coil 5 and/or between layers of the primary coil 5, and further its constituting  
15 structure is the same as the previous embodiment except for the following points. The portions bearing the same reference numerals as those of the previous embodiment designate the same or common elements as those in the previous embodiment.

20 [ 0078 ]

Namely, the different points from the previous embodiment are that the soft epoxy resin 17 is not injected between the center core 1 and the secondary coil bobbin 2, instead of that, the center core 1 is  
25 in advance covered by an insulation member 60 having an elasticity, for example silicon rubber, urethane and acrylic resin before being disposed inside the

secondary coil bobbin 2 and after the covered center core 1 is disposed in the secondary coil bobbin 2, a hard epoxy resin 8 is filled between the center core 1 and the secondary coil bobbin 2.

5 [ 0079 ]

According to the present embodiment, in addition to the advantages obtained by the first embodiment, the following functions and advantages are obtained. Through the absorption of the thermal impact between  
10 the center core 1 and the secondary coil bobbin 2 with the elastic member (the center core coating) 60, it is contributed to reduce the thermal stress  $\sigma$  in the secondary coil bobbin 2. Moreover, in comparison with the injection and hardening works (injection and  
15 hardening in vacuum) of the soft epoxy resin in the narrow space between the secondary coil bobbin and the center core, the center core coating 60 can be performed only for the center core separate from the other constituting elements. Further, the injection  
20 and hardening of the usual hard epoxy resin between the center core and the secondary coil bobbin after inserting the coated center core 1 into the secondary coil bobbin can be performed easily because the viscosity of the hard epoxy resin is low in comparison  
25 with the soft epoxy resin, thereby, the work cost therefor can be reduced, in addition magnetic vibration generated from the center core can be

effectively absorbed to achieve a noises reduction.

[ 0080 ]

[ Advantages of the Invention ]

According to the present invention, in an  
5 independent ignition type ignition coil which is  
fitted in a plug hole and is subjected to a severe  
temperature environment, the thermal stress in the  
secondary coil bobbin due to the linear expansion  
coefficient differences between constituting members  
10 is relaxed, the crackings in the secondary coil bobbin  
is surely prevented, a soundness of an electric  
insulation performance thereof is held and a high  
quality and high reliability of the concerned type of  
ignition coil device is achieved.

15

[ Brief Description of the Drawings ]

[ Fig. 1 ]

A vertical cross sectional view of an ignition  
coil for an internal combustion engine representing  
20 one embodiment of the present invention.

[ Fig. 2 ]

An enlarged view showing by enlarging and turning  
in lateral direction of portion B in Fig. 1.

[ Fig. 3 ]

25 A lateral cross sectional view taken along a line  
A-A' in Fig. 1.

[ Fig. 4 ]

An enlarged cross sectional view of portion C in Fig. 2.

[ Fig. 5 ]

An enlarged cross sectional view of portion C  
5 representing another embodiment of the present invention.

[ Fig. 6 ]

An upper plane view of an ignitor casing in the above embodiment.

10 [ Fig. 7 ]

(a) is a front view showing a transfer-molded ignition coil drive circuit used in the above embodiment, (b) is an upper plane view thereof and (c) is an upper plane view showing a mounting of the  
15 ignition coil drive circuit before performing the transfer-molding.

[ Fig. 8 ]

A model diagram showing manners of insulation breakdown when crackings are caused in respective  
20 parts in the ignition coil.

[ Fig. 9 ]

A cross sectional view of the primary coil used in the above embodiment.

[ Fig. 10 ]

25 A model diagram showing a part of the secondary coil bobbin used in the above embodiment while dividing the same in half and locally cross sectioning

thereof.

[ Fig. 11 ]

An enlarged view of portion P in Fig. 10.

[ Fig. 12 ]

5       A diagram showing a relationship between expansion coefficient of the secondary coil bobbin in the circumferential direction (the orthogonal direction with respect to the resin flowing direction during the molding thereof) and induced stress in the  
10 secondary coil bobbin.

[ Fig. 13 ]

A diagram showing a relationship between mica content in the secondary coil bobbin and linear expansion coefficient.

15       [ Fig. 14 ]

A diagram showing a relationship between induced stress in the secondary coil bobbin and heat cycle number.

[ Fig. 15 ]

20       A vertical cross sectional view of an ignition coil for an internal combustion engine representing still another embodiment of the present invention and an enlarged cross sectional view of portion E.

25 [ Description of Reference Symbols ]

1...center core, 2...secondary coil bobbin, 3...secondary coil, 4...primary coil bobbin, 5...primary

coil, 5A...insulation cover film, 5B...slipping property improving cover film, 6...coil casing, 8...epoxy resin, 17...soft epoxy resin, 50, 51...air gap portion (peeling off portion).

[ Name of the Document ]      Document of Abstract

[ Abstract ]

[ Tasks ]      To reduce a thermal stress in a secondary coil bobbin for an independent ignition type  
5 ignition coil which is subjected to a severe temperature environment, to prevent crackings of the bobbin and to achieve soundness of electric insulation property thereof.

[ Counter Measure ]      In an independent ignition  
10 type ignition coil for an internal combustion engine which is used being directly coupled to a corresponding ignition plug, a center core 1, a secondary coil 3 wound around a secondary coil bobbin 2 and a primary coil 5 wound around a primary coil  
15 bobbin 4 are arranged concentrically in a coil casing 6 in this order from the inside thereof and such as epoxy resin 8 and soft epoxy 17 are filled between these constituting members, wherein on the outer surface of the primary coil 5 a cover film which  
20 promotes peeling off thereof from the epoxy resin 8 is formed, and because of existence of these peeling off portions between the primary coil 5 and the epoxy resin 8 and between the layers of the primary coil 5, a stress component induced inside the secondary coil  
25 bobbin 2 due to heat contraction difference between the primary coil 5 and the secondary coil bobbin 2 among thermal stress induced inside the secondary coil

bobbin 2 is reduced.

[ Drawings to Be Selected ]      Fig. 1.




ファイル名 = A99001681A1.e1

【書類名】 図面

【図 1】

Fig. 1

図 1

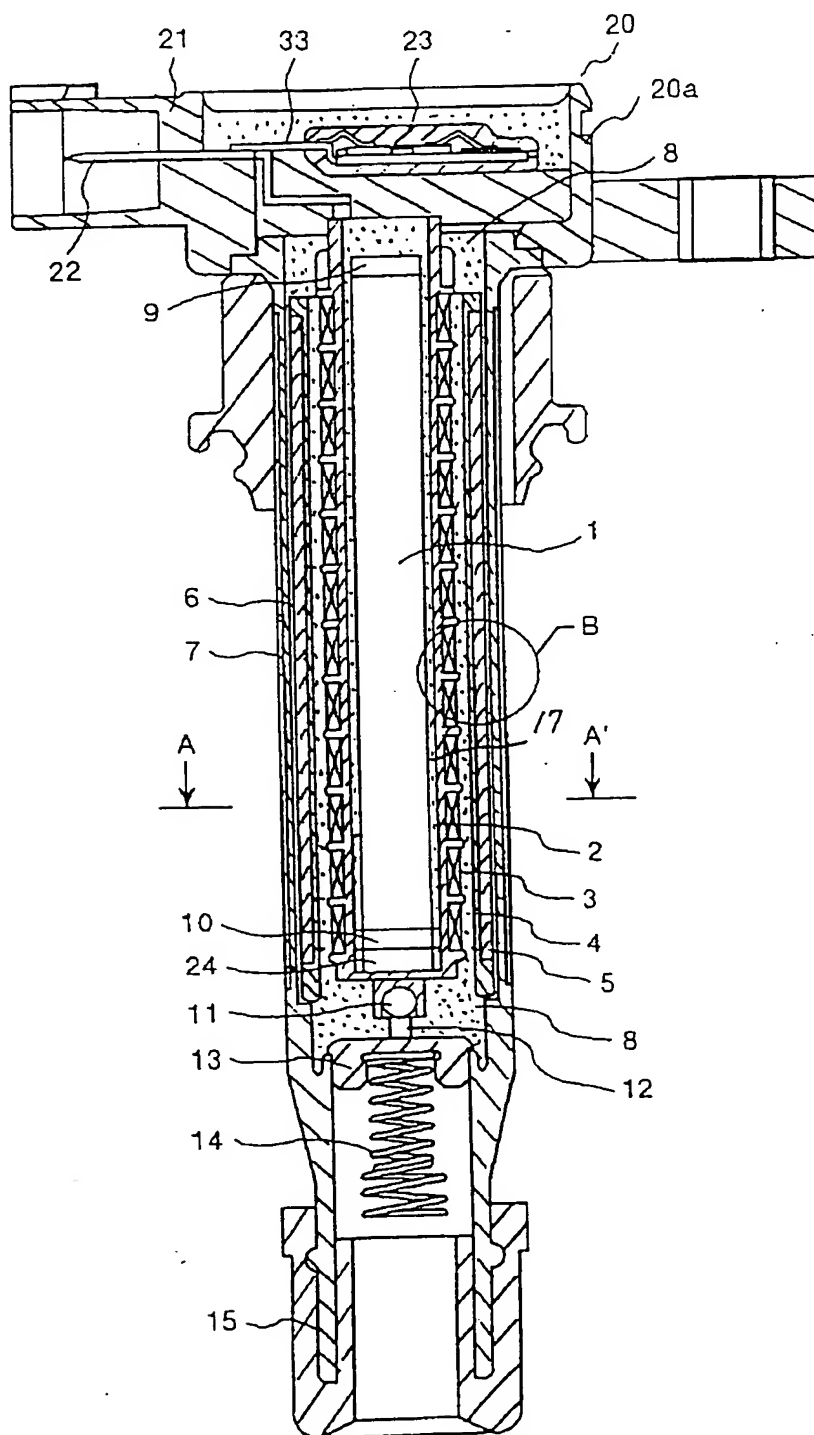


ファイル名 = A99001681A1.el

〔図 2〕

Fig. 2

図 2

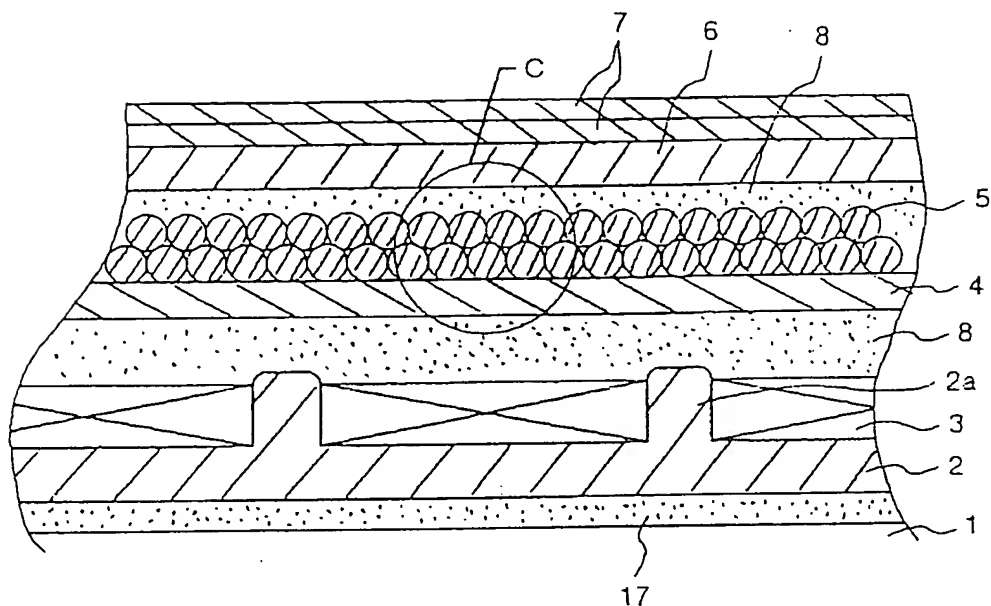


1…センタコア 2…2次ボビン 3…2次コイル  
 4…1次ボビン 5…1次コイル 6…コイルケース  
 7…サイドコア 8…エポキシ樹脂 17…軟質エポキシ

1…center core, 2…secondary coil bobbin,  
 3…secondary coil, 4…primary coil bobbin,  
 5…primary coil, 6…coil casing,  
 7…side core, 8…epoxy resin, 17…soft epoxy resin.

ファイル名 = A99001681A1.el

【図 3】

Fig. 3  
図 3

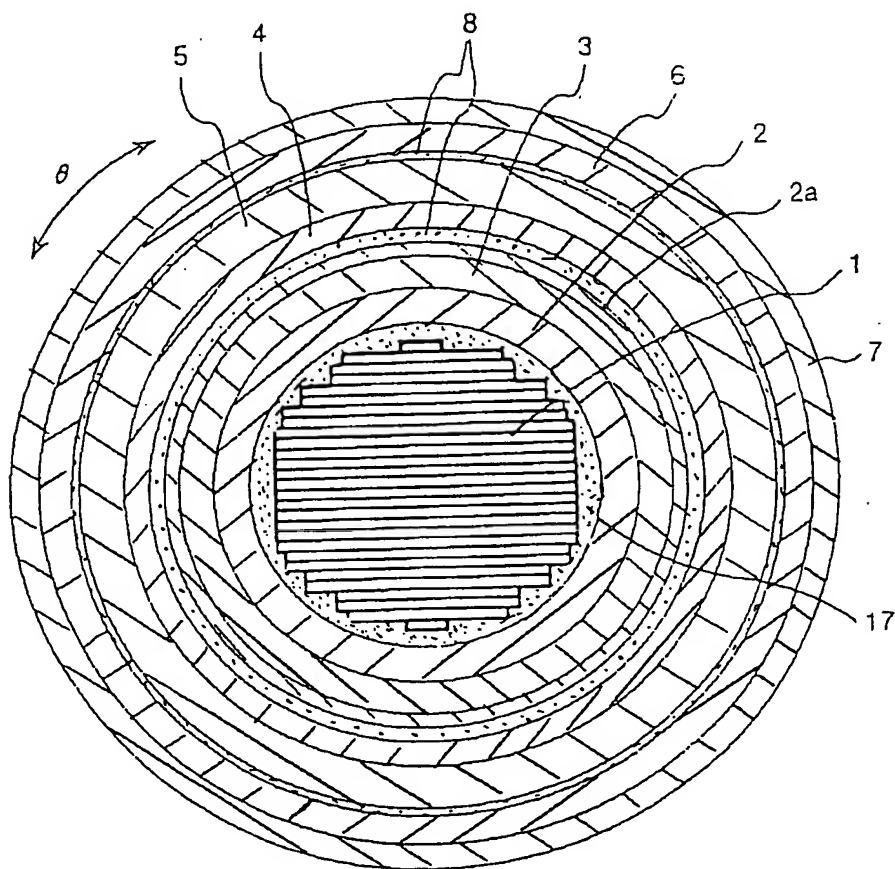


ファイル名 = A99001681A1.el

【図 4】

Fig. 4

図 4

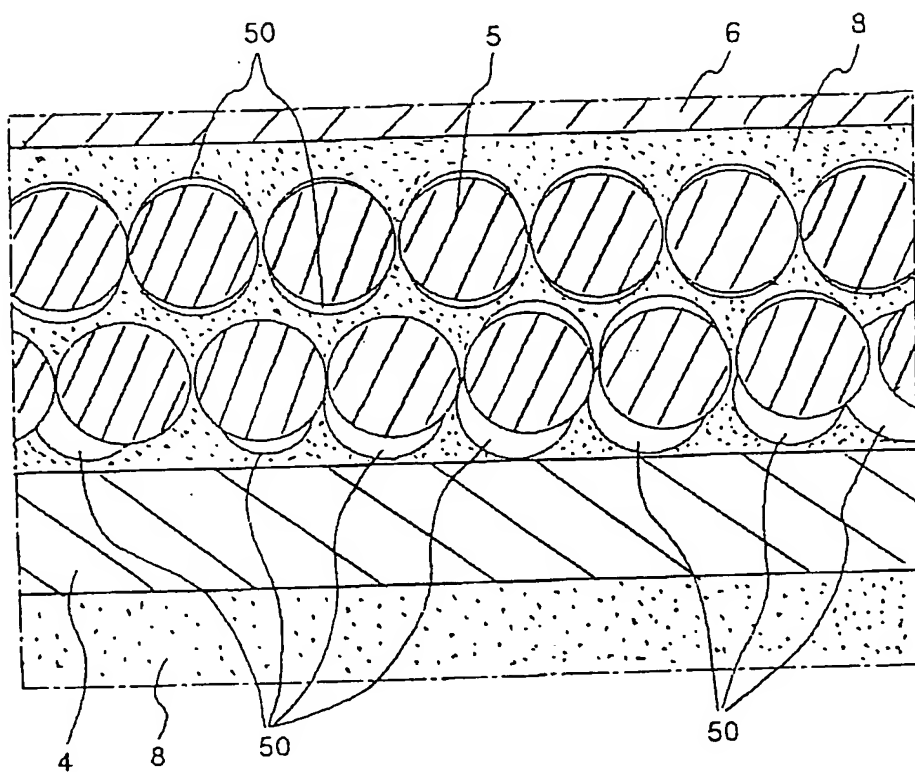


ファイル名 = A99001681A1.e1

【図 5】

Fig. 5

図 5

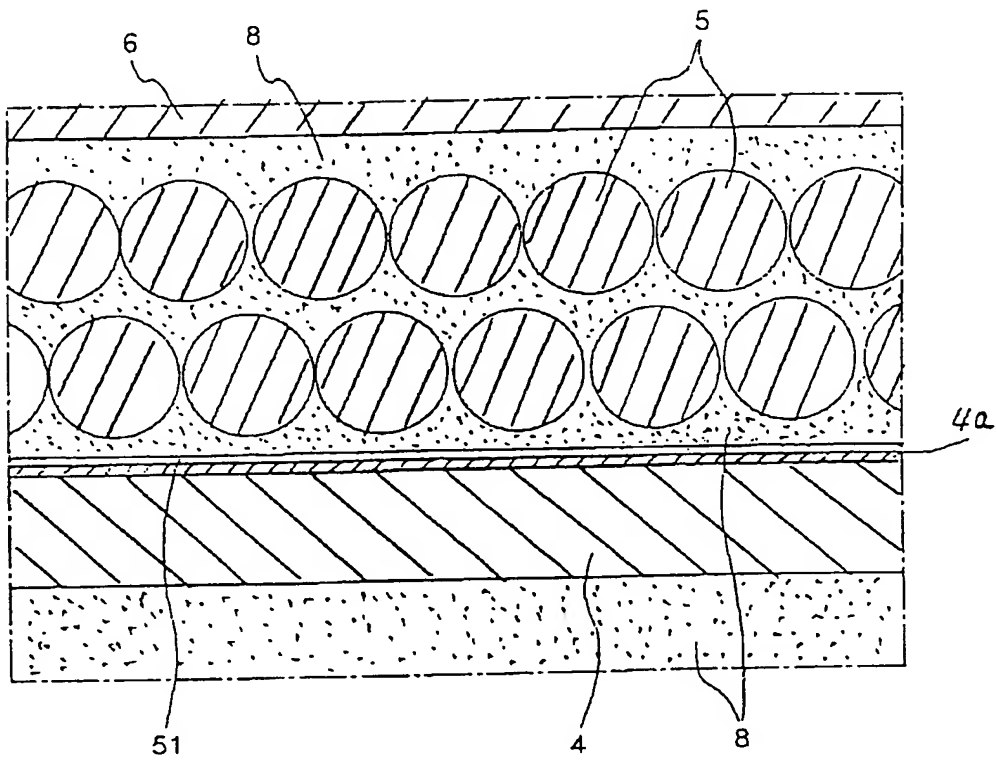


ファイル名 = A99001681A1.el

【図 6】

Fig. 6


図 6

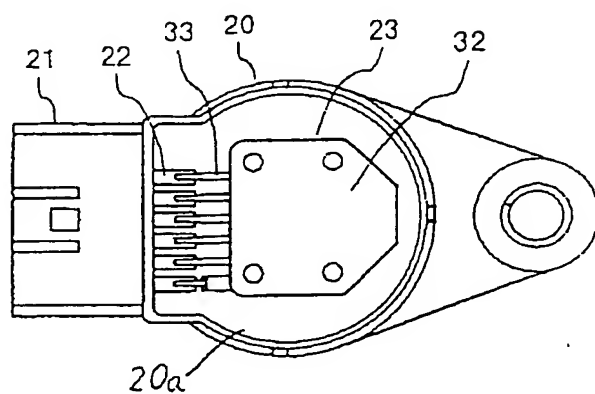

【図 7】

Fig. 7

図 7

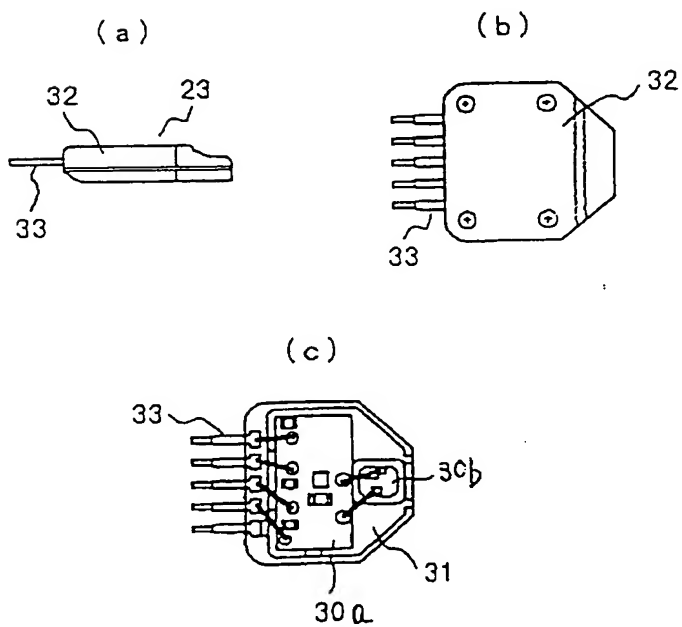


ファイル名 = A99001681A1.el

【図 8】

Fig. 8


図 8

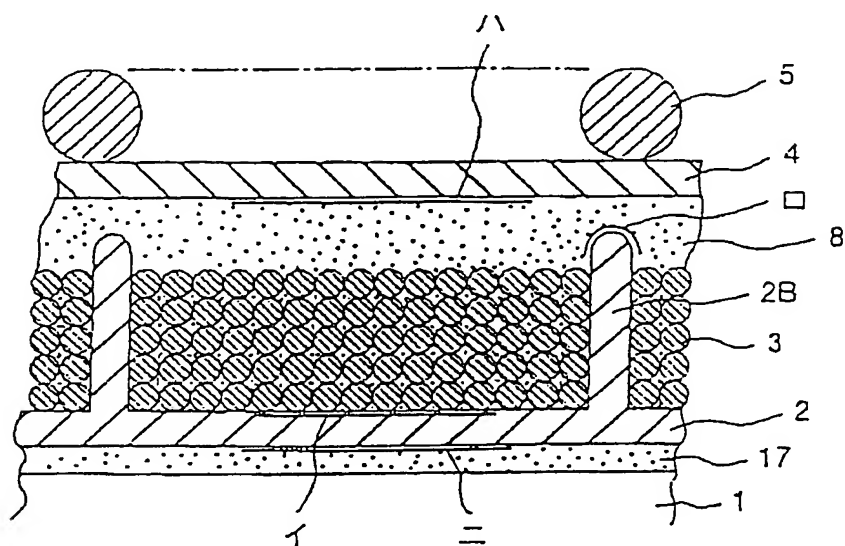

【図 9】

Fig. 9

図 9




ファイル名 = A99001681A1.e1

【図 10】

Fig. 10

図 10

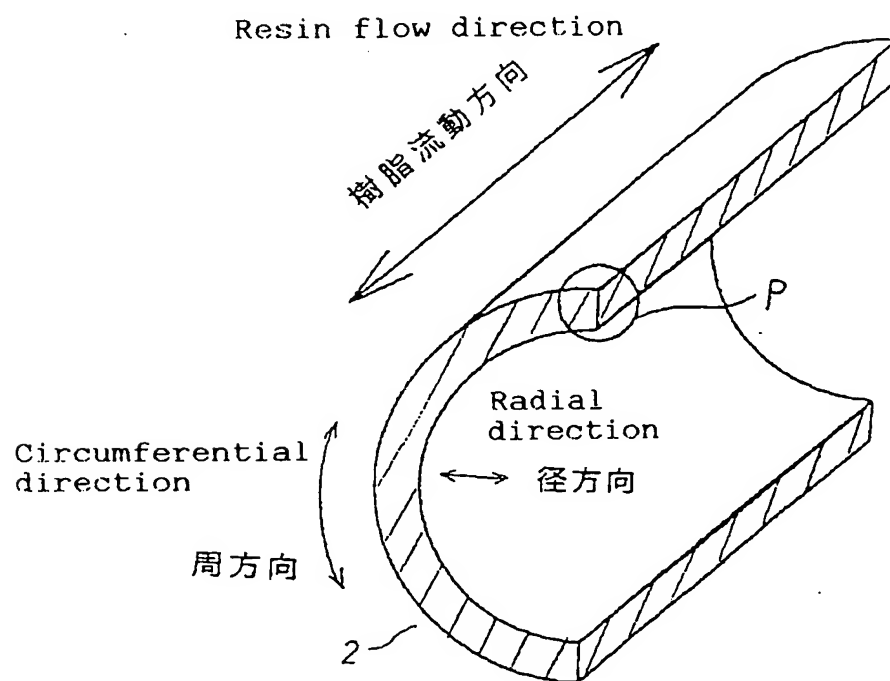




ファイル名 = A99001681A1.e1

【図 11】

Fig. 11

図 11

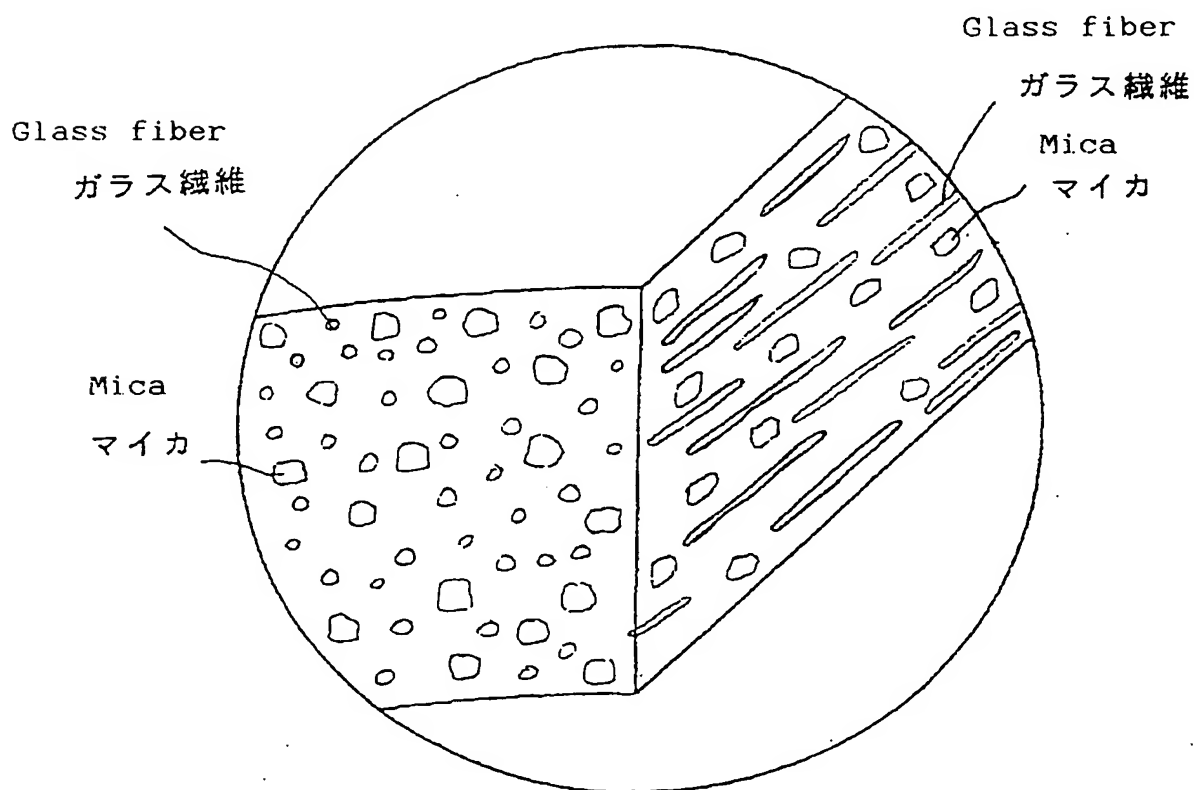

ファイル名 = A99001681A1.el


[ 図 1 2 ]

Fig. 12

図 1 2

Induced stress in secondary coil  
bobbin ( $\theta$  direction)

二次ボビンの発生応力 ( $\theta$  方向)

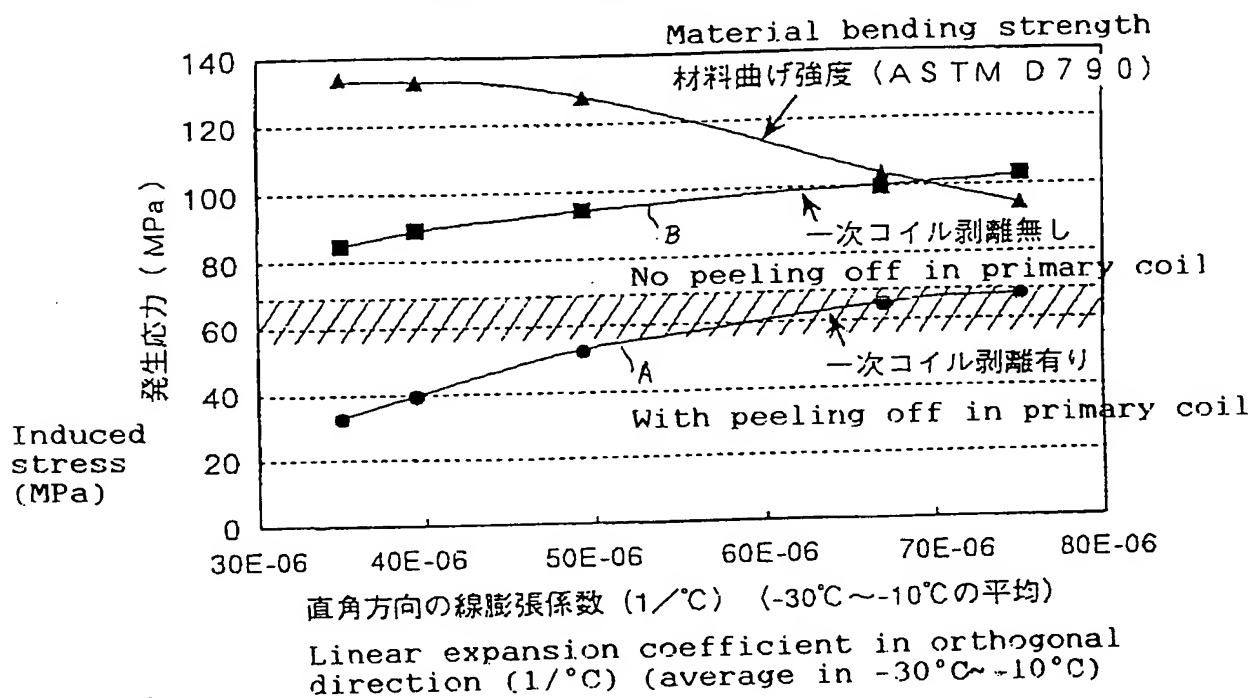


ファイル名 = A99001681A1.el

【図 13】

Fig. 13

図 13

Relationship between mica content in secondary  
coil bobbin and linear expansion coefficient  
二次ホビンのM i c a含有量と線膨張係数の関係

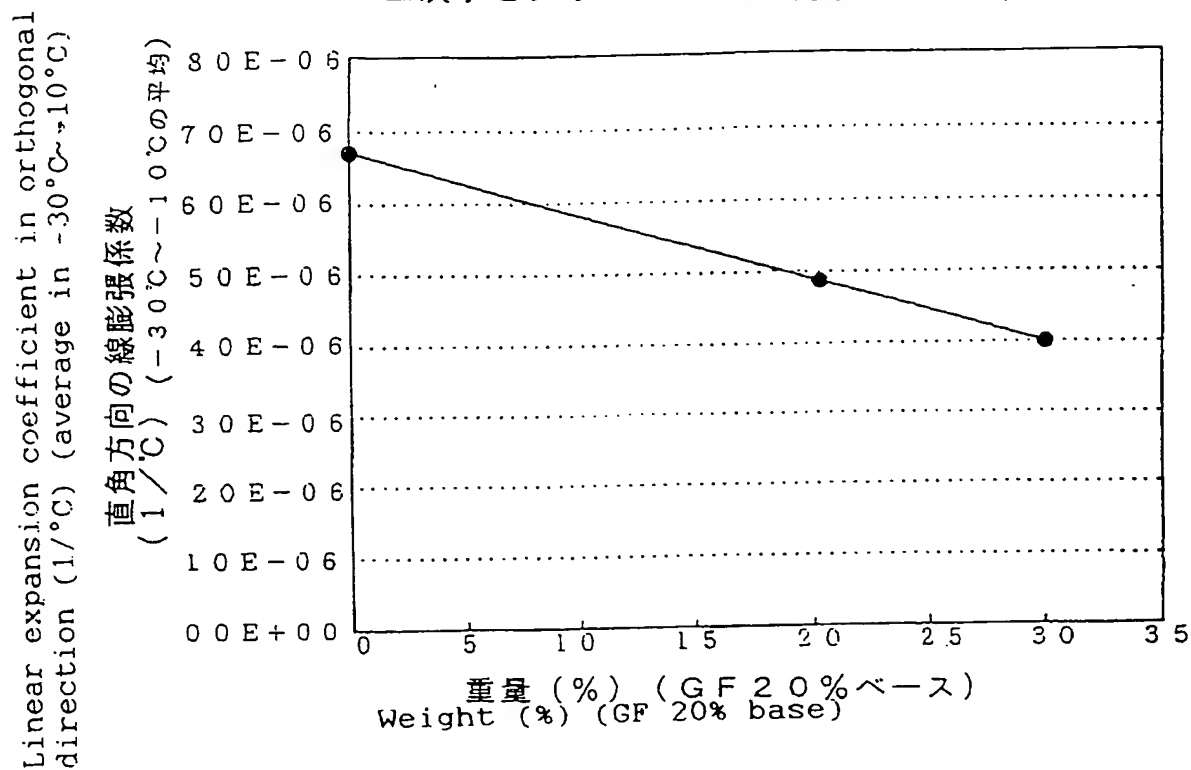

ファイル名 = A99001681A1.el


【図 14】

Fig. 14

図 14

Relationship between induced stress  
and cycle number

発生応力とサイクル数の関係

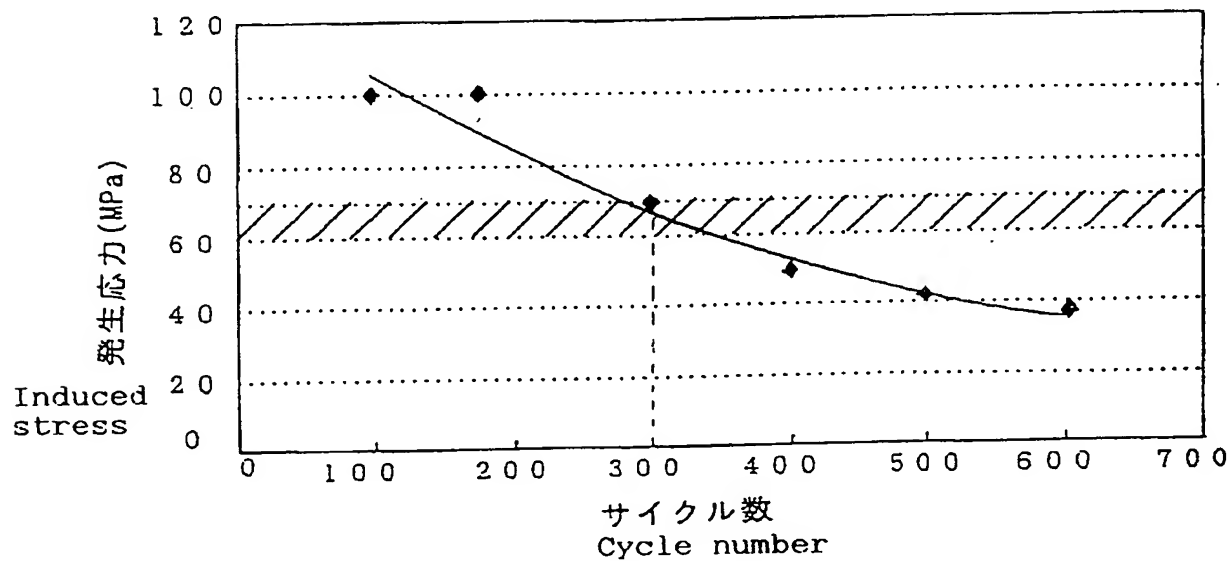

ファイル名 = A99001681A1.e1

【図 15】

Fig. 15

図 15

